

system components for integrators

dynAXIS® XS, dynAXIS® T, dynAXIS® S, dynAXIS® M, dynAXIS® L



dynAXIS® galvanometer scanners are high-performance rotary motors for optical applications. They consist of a motor section based on moving magnet technology and a high-precision position detector.

The primary area of application is the fast and precise positioning of mirrors for the deflection of laser beams.

The exceptional dynamics of SCANLAB's dynAXIS® scanners are the result of years of experience in developing and manufacturing scanners, scan systems and scan solutions for industrial use.

The motor section of each dynAXIS® is ideally matched to the inertial load presented by the mirror. The optimized rotor design is largely responsible for the favorable dynamic properties and resonance characteristics. Axially pre-loaded precision ball bearings guarantee a backlash-free rotor assembly with high stiffness and low friction. Special attention has been paid to long bearing lifetimes.

The optical position detector system is characterized by high resolution, as well as good repeatability and drift values. The scanners are equipped with heaters and temperature sensors (except dynAXIS® XS and dynAXIS® T). This allows temperature stabilization for further enhancing long-term stability, even under fluctuating ambient conditions.

SCANLAB provides all dynAXIS® scanners with suitable mirrors and mirror coatings for all typical laser wavelengths. In addition to very good reflection properties, the mirrors are also optimized with respect to inertial load, stiffness and flatness.

The high quality of SCANLAB's galvanometer scanners enables error-free operation in long-term and continuous use. Comprehensive measurements on custom test benches assure that the highest level of quality is continuously maintained.



dynAXIS® XS
dynAXIS® T
dynAXIS® S
dynAXIS® M
dynAXIS® L

Mounting

The rotationally symmetrical flange facilitates mounting. The scanner housing must be electrically insulated from the machine structure. Mirror stops are already integrated in the scanners. The mirror is directly bonded to the scanner's shaft; the mirrors of the dynAXIS® M and dynAXIS® L are attached via a mirror mount to the shaft.

Common Specifications

(all angles are in mechanical degrees)

Optical Performance

Maximum scan angle	±12 °
Nonlinearity	< 0.4 % ptp
Offset drift	< 15 µrad/K
Gain drift	< 50 ppm/K
Repeatability	5 µrad

Position Detector (PD)

Typical PD output signal	
- differential mode	-11 µA°
- common mode	-140 µA
PD supply voltage	6.5 V - 11.5 V
PD supply current	35 mA - 60 mA

Heater⁽¹⁾

Heater resistance	120 Ω
Temperature sensor resistance	1000 Ω @ 25 °C 578 Ω @ 40 °C

Cable

0.22 m long

Installation

electrically insulated

Operating Temperature

25 ± 20 °C

Electrical Connections

(with SSV30)

Power supply voltage	±(15+1.5) V DC
Input signals	alternatively: ±4.8 V; ±9.6 V; ±4.8 mA; ±9.6 mA
Output signals	3 status signals, TTL level

Long-term drift over

8 hours (with SSV30)

with temperature stabilization⁽¹⁾ < 0.6 mrad optical (after warm-up)

without temperature stabilization < 0.3 mrad optical plus temperature-induced gain and offset drift

Operating Temperature


25 ± 10 °C (with SSV30)

Type-Dependent Specifications


	dynAXIS®				
	XS	T	S	M	L
Rotor inertia	0.028 g·cm ²	0.125 g·cm ²	0.34 g·cm ²	1.2 g·cm ²	5.1 g·cm ²
Torque constant	2.3 N·mm/A	5.3 N·mm/A	7.5 N·mm/A	15 N·mm/A	24 N·mm/A
Coil resistance	3.9 Ω	2.8 Ω	2.7 Ω	2.2 Ω	0.85 Ω
Coil inductance	90 µH	145 µH	165 µH	275 µH	300 µH
Max. RMS current (max. case temp. 50 °C)	1.8 A	2.2 A	2.5 A	3.5 A	5 A
Peak current	6 A	10 A	10 A	10 A	15 A
Weight	49 g	72 g	263 g	340 g	425 g
without cable	23 g	46 g	-	-	-
Connector	SD-9 plug	SD-9 plug			
with heater ⁽¹⁾			SD-15 socket	SD-15 socket	SD-15 socket
Inertial Load					
recommended	0.02 g·cm ²	0.1 g·cm ²	0.35 g·cm ²	1.2 g·cm ²	8 g·cm ²
maximum	0.05 g·cm ²	0.5 g·cm ²	1.5 g·cm ²	6 g·cm ²	25 g·cm ²
Recommended Aperture	7 mm	8.5 mm	10 mm	14 mm	20...30 mm
Step Response Time (with SSV30) (settling to 1/1000 of full scale, with recommended inertial load)					
1% of full scale	0.23 ms	0.24 ms	0.25 ms	0.40 ms	0.80 ms
Dynamic Performance (with SSV30)					
Tracking error	0.11 ms	0.12 ms	0.14 ms	0.24 ms	0.35 ms

⁽¹⁾ not available for dynAXIS® XS and dynAXIS® T


dynAXIS® XS

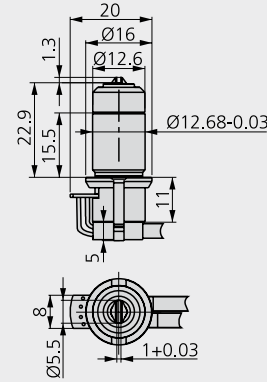


dynAXIS® T

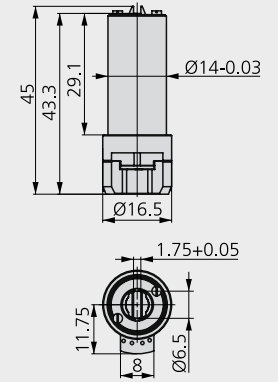


dynAXIS® S



dynAXIS® M

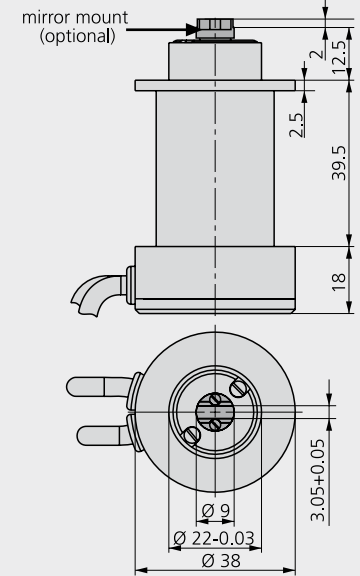

dynAXIS® L

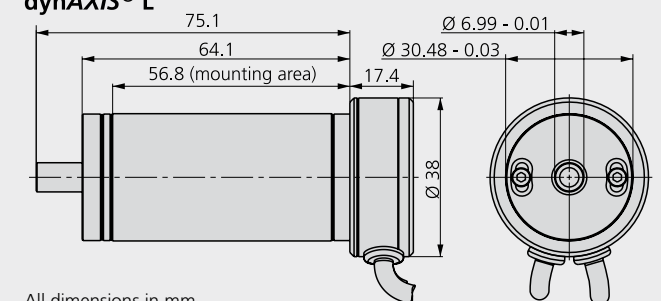

All dimensions in mm



SCANLAB AG · Siemensstr. 2a · 82178 Puchheim · Germany
 Tel. +49 (89) 800 746-0 · Fax +49 (89) 800 746-199 · info@scanlab.de · www.scanlab.de

SCANLAB America, Inc. · 100 Illinois Street · Suite 200 · St. Charles, IL 60174 · USA
 Tel. +1 (630) 797-2044 · Fax +1 (630) 797-2001 · info@scanlab-america.com · www.scanlab-america.com